

# SEUNGIL AHU

Supported Series: SENUGIL AVDP-NH-K1

Website : <http://seungil.en.ec21.com/>

## HMI Setting:

Parameters	Recommended	Options	Notes
PLC type	SEUNGIL AHU		
PLC I/F	RS-485 2W	RS232, RS485 2W/4W	
Baud rate	9600	9600 ~ 115200	
Data bits	8	7,8	
Parity	None	Even, Odd, None	
Stop bits	1	1	
PLC sta. no.	1	0 ~ 99	
Turn around delay(ms)	0 (Normal) 30 (cMT Series)		


Online simulator	YES	Extend address	NO
------------------	-----	----------------	----

## Device Address:


Bit/Word	Device type	Format	Range	Memo
B	BIT	DDD.DDD.DDDdd	0 ~ 255.255.25515	
W	WORD	DDD.DDD.DDD	0 ~ 255.255.255	

## Wiring Diagram:

### Diagram 1

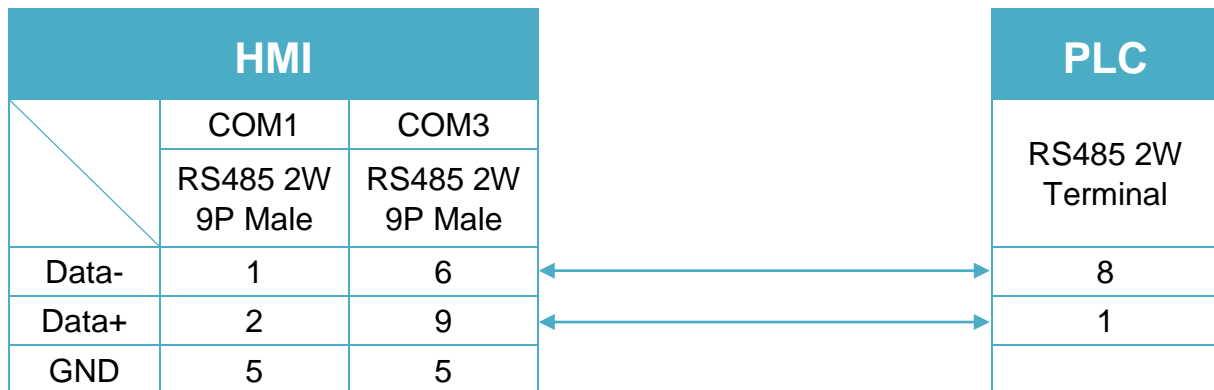**cMT Series**
***cMT3151***
**eMT Series**
***eMT3070 / eMT3105 / eMT3120 / eMT3150***


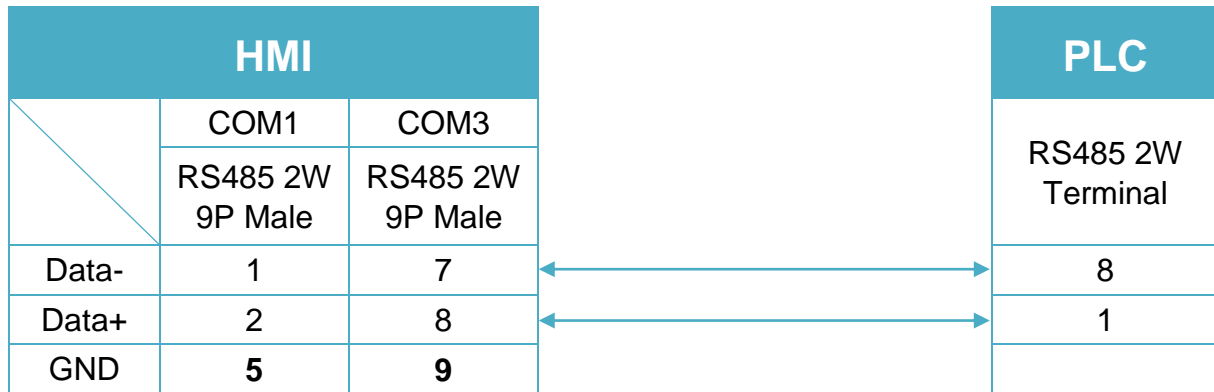
### Diagram 2

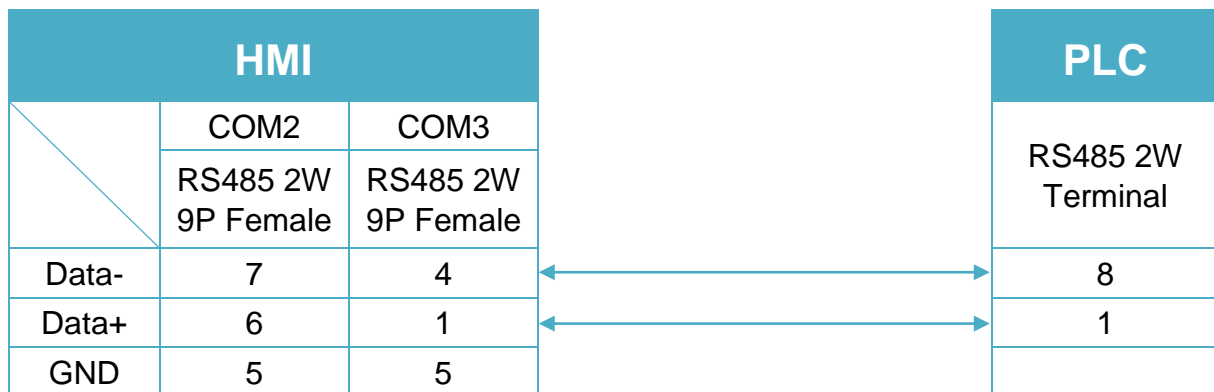**cMT Series**
***cMT-SVR / cMT-G01 / cMT-G02 / cMT-HDM / cMT-FHD***
**mTV**
***mTV***


### Diagram 3

**MT-iE** *MT8070iE / MT6070iE / MT8100iE / MT8121iE / MT8150iE*

**MT-XE** *MT8121XE / MT8150XE*




### Diagram 4

**cMT Series** *cMT3071 / cMT3072 / cMT3090 / cMT3103*

**MT-iE** *MT8071iE / MT6071iE / MT8072iE / MT6072iE / MT8073iE / MT8101iE / MT8102iE / MT8103iE*

**MT-XE** *MT8090XE / MT8092XE*


**MT-iP** *MT6103iP / MT8102iP*

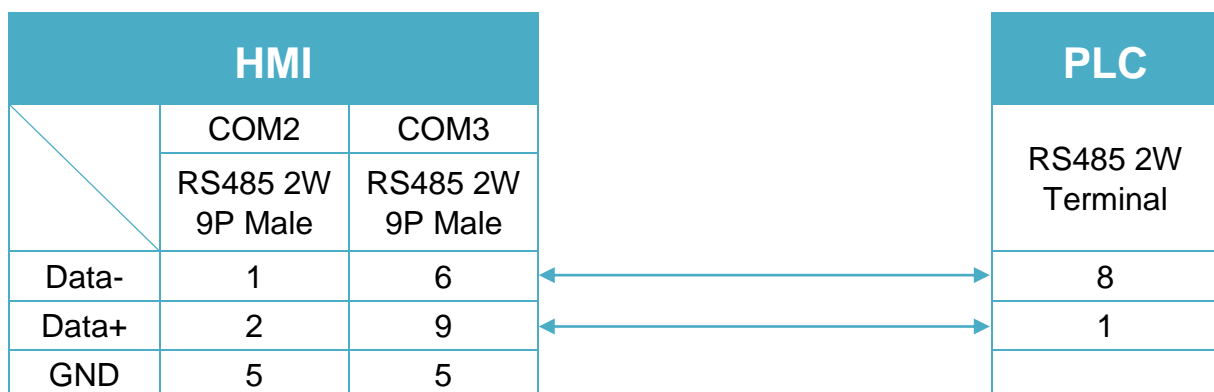

## Diagram 5

**MT-iE** *MT8050iE/ MT8053iE*

**MT-iP** *MT6051iP / MT8051iP*

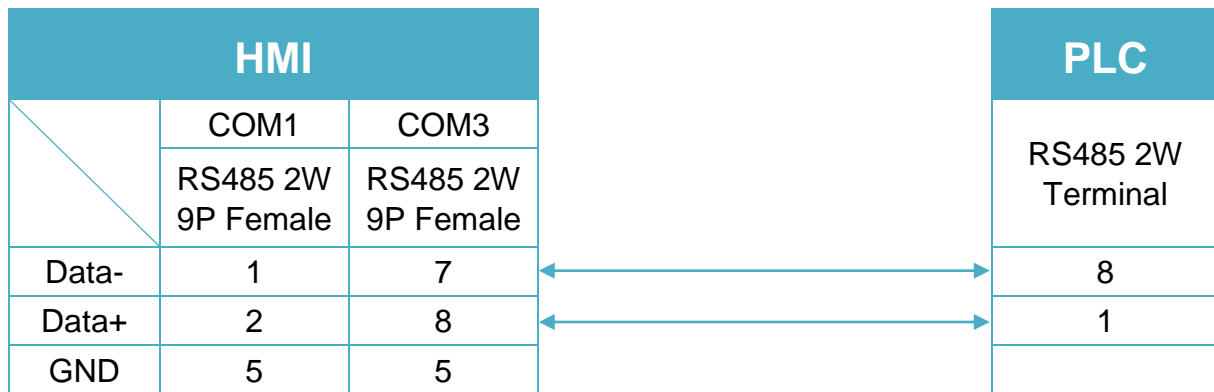

## Diagram 6

**MT-iP** *MT6071iP / MT8071iP*

