

# DELTA AS300 MODBUS RTU/ASCII

Supported Series: DELTA AS300

Website: <http://www.deltadriver.com>

## HMI Setting:

Parameters	Recommended	Options	Notes
PLC type	DELTA DVP		
PLC I/F	RS485 2W		
Baud rate	9600	9600 ~ 115200	
Data bits	7	7,8	
Parity	Even	Even / Odd / None	
Stop bits	1	1,2	
PLC sta. no.	1	1 ~ 254	
Modbus protocol	ASCII	RTU / ASCII	

## Device Address:

Bit/Word	Device type	Format	Range	Memo
B	X_Bit	DDdd	0 ~ 6315	
B	Y_Bit	DDdd	0 ~ 6315	
B	M	DDDD	0 ~ 8191	
B	SM	DDDD	0 ~ 4095	
B	S	DDDD	0 ~ 2047	
B	T_Flag	DDD	0 ~ 511	
B	C_Flag	DDD	0 ~ 511	
B	HC_Flag	DDD	0 ~ 255	
B	D_Bit	DDDDDdd	0 ~ 2999915	
W	X	DD	0 ~ 63	
W	Y	DD	0 ~ 63	
W	SR	DDDD	0 ~ 2047	
W	D	DDDDD	0 ~ 29999	
W	T	DDD	0 ~ 511	
W	C	DDD	0 ~ 511	
DW	HC	DDD	0 ~ 255	
W	E	D	0 ~ 9	

## Wiring Diagram:

RS-485 2W Terminal (Diagram 1 ~ Diagram 6)


### Diagram 1

**cMT Series**

***cMT3151***

**eMT Series**

***eMT3070 / eMT3105 / eMT3120 / eMT3150***

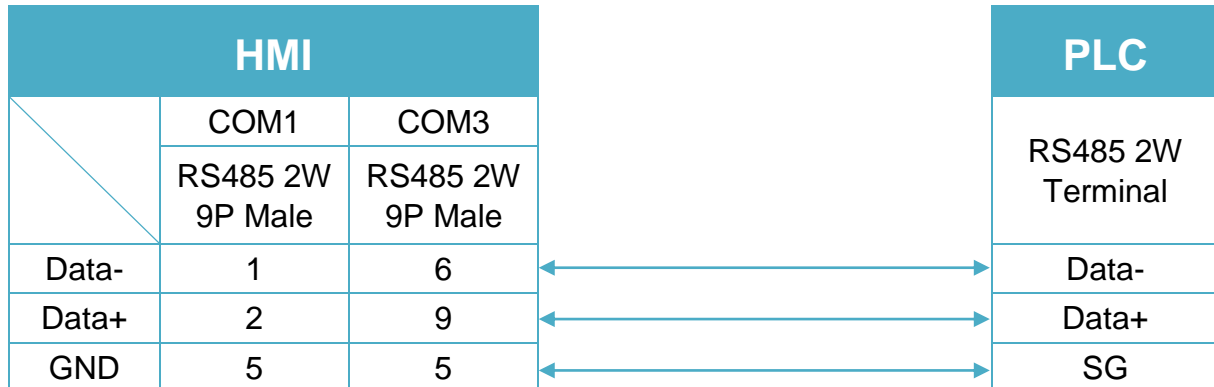


### Diagram 2

**cMT Series**

***cMT-SVR / cMT-G01 / cMT-G02 / cMT-HDM / cMT-FHD***

**mTV**

***mTV***

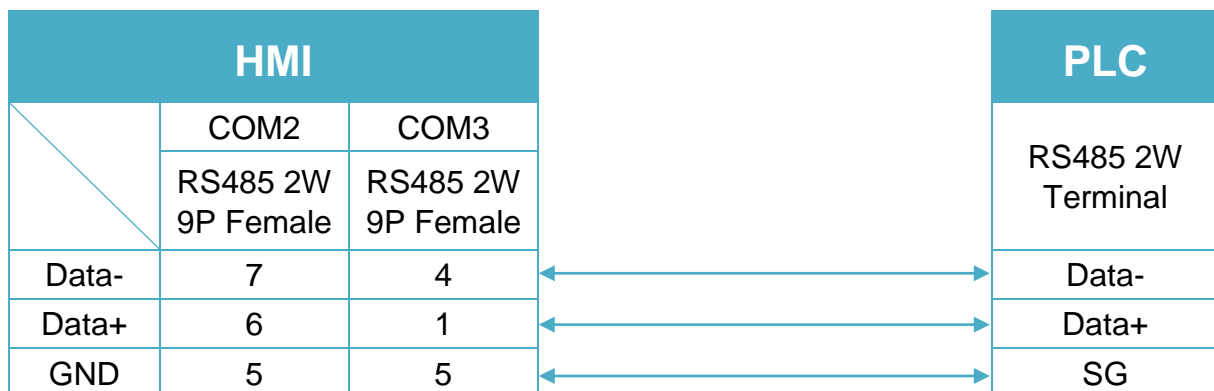




## Diagram 5

**MT-iE** *MT8050iE / MT8053iE*

**MT-iP** *MT6051iP / MT8051iP*

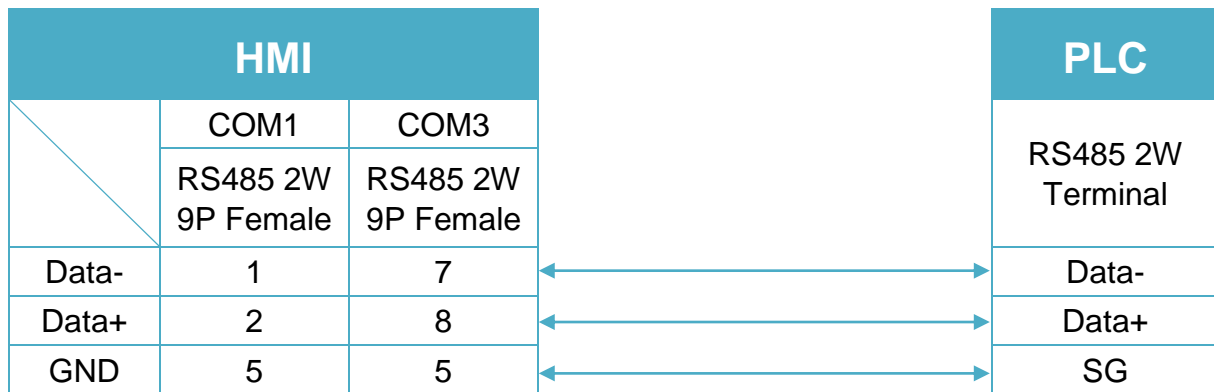

## Diagram 6

**MT-iP** *MT6071iP / MT8071iP*

