

# Schneider Zelio

Supported Series: Schneider Zelio Logic

Website: <http://www.schneider-electric.com/ww/en/>

## HMI Setting:

Parameters	Recommended	Options	Notes
PLC type	Schneider Zelio		
PLC I/F	RS232		
Baud rate	115200		
Data bits	7		
Parity	Even		
Stop bits	1		
PLC sta. no.	1		

## Device Address:

Bit/Word	Device type	Format	Range	Memo
B	I	DD	1 ~ 99	Input
B	SLI_Bit	DDh	10 ~ 24f	Serial link input
B	SLO_Bit	DDh	250 ~ 48f	Serial link output (read only)
B	State	D	1	State in PLC (read only)
W	AI	DD	1 ~ 99	Analogy input (default: 1 ~ 4)
W	SL_IN	DD	1 ~ 24	Serial link input
W	SL_OUT	DD	25 ~ 48	Serial link output (read only)
W	Time	D	1 ~ 6	Time & Day*
W	Order	D	1	Command** (write only)

\* address 1 : second, address 2 : minute, address 3 : hour , address 4 : day, address 5 : month, address 6 : year. The value range for "Year" is 0~99, entering "0" represents year 2000, entering "99" represents year 2099.


\*\* run mode write 2, stop mode write 1.

## Wiring Diagram:

RS-232 9P D-Sub (Diagram 1 ~ Diagram 4)

### Diagram 1


<b>cMT Series</b>	<b><i>cMT3071 / cMT3072 / cMT3090 / cMT3103 / cMT3151</i></b>
<b>eMT Series</b>	<b><i>eMT3070 / eMT3105 / eMT3120 / eMT3150</i></b>
<b>MT-iE</b>	<b><i>MT8070iE / MT6070iE / MT8100iE / MT8121iE / MT8150iE / MT8071iE / MT6071iE / MT8072iE / MT6072iE / MT8073iE / MT8101iE / MT8102iE / MT8103iE</i></b>
<b>MT-XE</b>	<b><i>MT8121XE / MT8150XE / MT8090XE / MT8092XE</i></b>
<b>MT-iP</b>	<b><i>MT6103iP / MT8102iP</i></b>

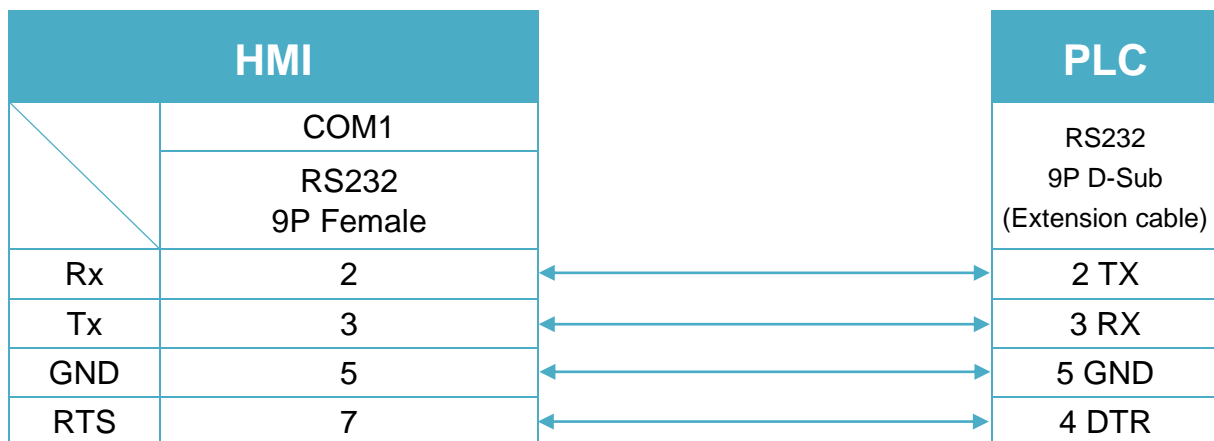

## Diagram 2

**cMT Series**                      *cMT-SVR/ cMT-G01 / cMT-G02 / cMT-HDM / cMT-FHD*


**mTV**                                *mTV*

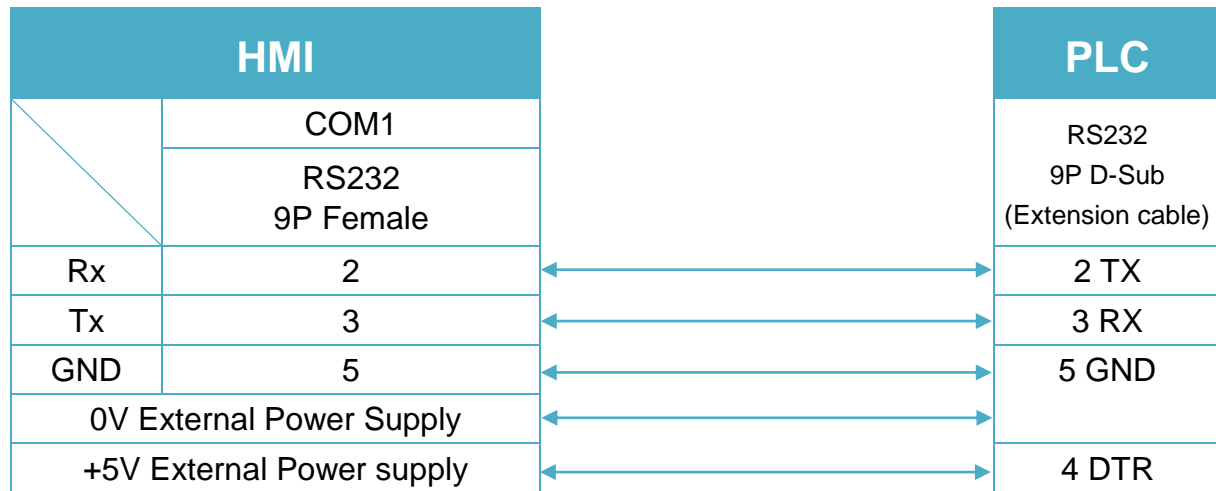


## Diagram 3

**MT-iE**                                *MT8050iE / MT8053iE*

**MT-iP**                                *MT6051iP / MT8051iP*

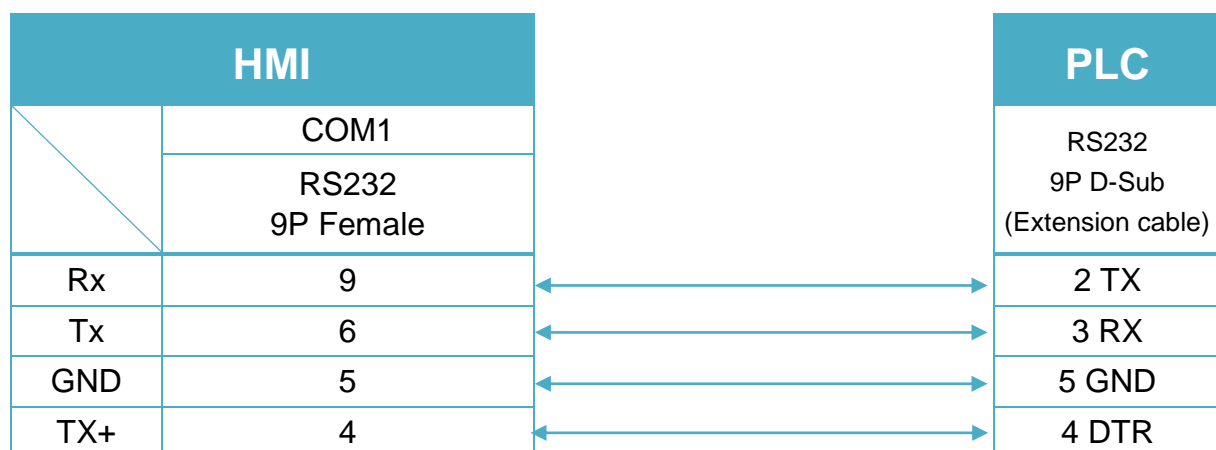

## Diagram 4

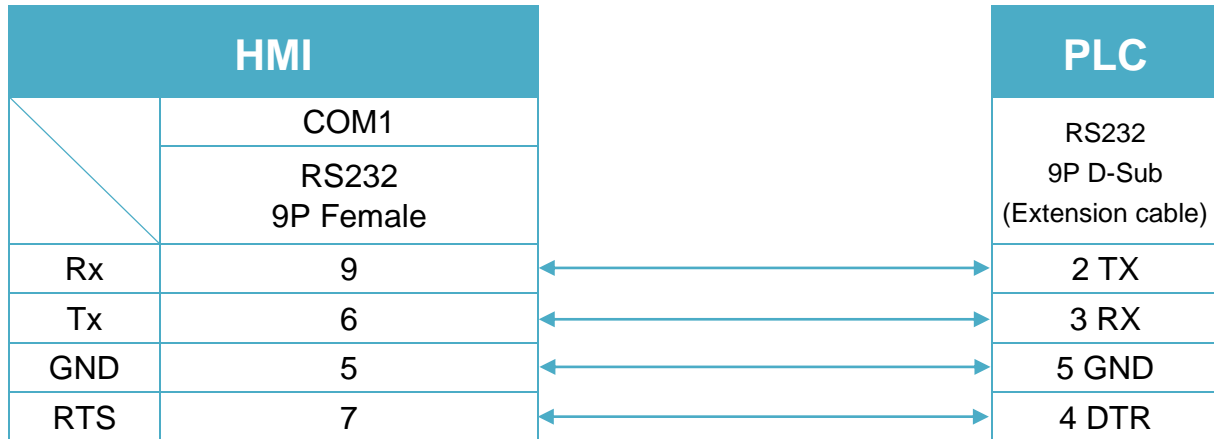**MT-iP**
**MT6071iP / MT8071iP**


SR2CBL01 cable to 9-way serial port

Note: Please use SR2CBL01 cable (Accessories from Zelio Logic) and extension cable (as shown) to communicate with HMI series.

