




### Features


- Supports Display on cMT-iV5/cMT-iPC15/PC/Android/iPad
- Compact Design and DIN-rail Mountable
- Fan-less Cooling System
- Built-in 256 MB Flash Memory
- SD Card Slot for Expansion of Storage
- One USB Host Port
- Two Gigabit Ethernet Ports
- Supports E-mail
- Supports MPI 187.5K
- Built-in Power Isolator
- Built-in EasyAccess 2.0 License

<b>Memory</b>	Flash	256 MB
	RAM	256 MB
<b>Processor</b>		32 bits RISC Cortex-A8 600MHz
<b>I/O Port</b>	SD Card Slot	SD/SDHC
	USB Host	USB 2.0 x 1
	USB Client	N/A
	Ethernet	10/100/1000 Base-T x 2
	COM Port	COM1: RS-232 COM2 RS-485 2W/4W COM3: RS-485 2W
	RS-485 Dual Isolation	N/A
	CAN Bus	N/A
	HDMI	N/A
	Audio Output	N/A
	Video Input	N/A
<b>RTC</b>		Built-in
<b>Power</b>	Input Power	24±20%VDC
	Power Isolation	Built In
	Power Consumption	230 mA@24V
	Voltage Resistance	500VAC (1 min)
	Isolation Resistance	Exceed 50MΩ at 500VDC
	Vibration Endurance	10 to 25Hz (X, Y, Z direction 2G 30 minutes)
<b>Specification</b>	PCB Coating	Yes
	Enclosure	Plastic
	Dimensions WxHxD	130 x 115 x 27 mm
	Weight	Approx. 0.18 kg
	Mount	35mm DIN rail mounting
<b>Environment</b>	Protection Structure	IP20
	Storage Temperature	-20° ~ 70°C (-4° ~ 158°F)
	Operating Temperature	-20° ~ 55°C (-4° ~ 131°F)
	Relative Humidity	10% ~ 90% (non-condensing)
<b>Certificate</b>	CE	CE marked
	UL	cULus Listed
<b>Software</b>		EasyBuilder Pro V4.10.05 or later versions


## cMT-SVR-102 Dimensions

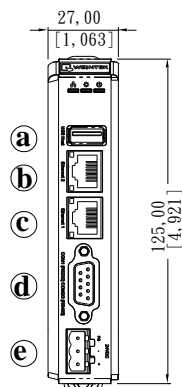


*Front View*

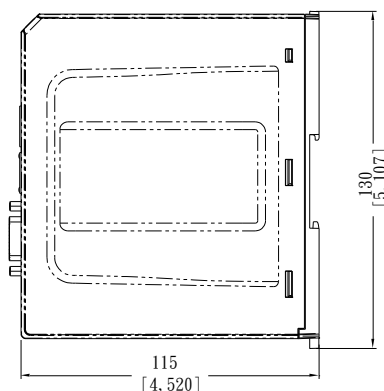

*Side View*



*Top View*



*Bottom View*

<b>a</b>	<b>USB Host Port</b>	<b>e</b>	<b>Power Connector</b>
<b>b</b>	<b>Ethernet 2 Port</b>	<b>f</b>	<b>SD Card Slot</b>
<b>c</b>	<b>Ethernet 1 Port</b>	<b>g</b>	<b>DIP Switch</b>
<b>d</b>	<b>COM1: RS-232, COM2: RS-485 2W/4W, COM3: RS-485 2W</b>	<b>h</b>	<b>Reset Button</b>

### Ordering Information

#### **cMT-SVR-102**

Built-in EasyAccess 2.0 license  
256 MB flash memory  
256 MB RAM on board  
10/100/1000M Ethernet port x 2

#### **RZC232300** (Optional)

Multi-connector cable  
COM1[232]/COM2[485]/COM3[485]